

Circle Communication Products, Inc



2.4GHz Multi-line and Multi-handset Cordless Telephone System

Handheld Extension
(WHE ER)

User Guide

Version 1.00

Distributed by:
**SINGAPORE
COMM**
www.singcomm.com.sg

COPYRIGHT

COPYRIGHT 2004, Circle Communication Products, Inc. ALL RIGHTS RESERVED.

This manual is the copyright of Circle Communication Products, Inc. You may not reproduce, transmit, transcribe, store in a retrieval system, or translate into any language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, any part of this publication without the express written permission of Circle Communication Products, Inc.

Disclaimer

Circle Communication Products, Inc. makes no representations or warranties regarding the content of this manual. We reserve the right to revise the manual or make changes in the specifications of the product described within it at any time without notice and without obligation to notify any person of such revision or change.

Table of Contents

COPYRIGHT	2
DISCLAIMER	2
1. INTRODUCTION	5
WELCOME	5
BEFORE USING.....	5
FEATURE HIGHLIGHTS.....	6
2. KEY REFERENCE GUIDE.....	7
OVERVIEW OF HANDSET	7
OVERVIEW OF HANDSET BASE	8
3. DISPLAY.....	9
BACKLIT LCD DISPLAY	9
NAME INPUT	9
SOFT KEYS	10
4. GETTING START	11
PACKAGE CONTENT	11
INSTALLATION	11
BATTERY CHARGE	12
5. REGISTRATION.....	13
6. MENU LIST.....	14
7. USING THE PHONE.....	16
OUTGOING CALL	16
INTERCOM CALL	16
PRE-DIALING	16
RECEIVING INCOMING CALL	16
RECEIVING INTERCOM CALL.....	17
REDIAL	17
MUTE.....	17
8. FEATURE OPERATION.....	18
AUTO ATTENDANCE	18
CALL FORWARD	18
CALL HOLD.....	19
CALL HOLD, EXCLUSIVE	19
CALL PAGING	19
CALL PICKUP	20
CALL TRANSFER	20
CALL TRANSFER (MAIL BOX).....	20
CALLER DISPLAY	20
CLOCK MODE.....	21
CONFERENCE	21
DATE & TIME	21
DEDICATED LINE.....	22
DIRECTORY (DIR).....	22
DO NOT DISTURB (DND)	22
HEADSET	22
INTERCOM	23
KEY SOUND	23
LCD CONTRAST.....	23
LINE TO LINE FORWARD	23
MAKE TOLL CALL.....	24
MEMO RECORDING	24
MUTE.....	24

NIGHT MODE	24
PHONE BOOK: COMMON STORE	25
PHONE BOOK – PERSONAL STORE	25
REDIAL	26
RING TONE AND VOLUME – LINE / INTERCOM	26
SPEAKER	26
USER NAME	26
VOICE MAIL	27
VOLUME ADJUSTMENT – SPEAKER/HANDSET RECEIVER/RINGER	28
9. IMPORTANT SAFETY INSTRUCTION	29
10. HARDWARE SPECIFICATION	31
OPERATING CONDITION:.....	31
11. LIMITED WARRANTY	32
12. IMPORTANT CONSUMER INFORMATION	35
CUSTOMER SERVICE.....	36

1. Introduction

Welcome


Thank you for choosing the Cordless Handheld Extension (WHE ER) display hands free feature telephone. To enjoy the full benefit of the features and use it safely, please read and follow all the instructions in this user guide.

Before Using

The Cordless Desktop Extension (WHE ER) cannot be used by itself. It is part of a cordless telephone system. All the cordless extensions require connection to the wireless Main Control Base (WMC ER). A maximum of 10 Extensions in any combination of cordless desktop (WDE ER) and cordless handheld (WHE ER) units can interface with the WMC ER. The only requirement is that the first unit connected be extension “0” which is used for the system configuration. For your convenience, the desktop unit is set as extension 0 and the two handheld units are set as extensions 1 & 2 respectively in the complete system package.

Calls are transmitted between the WHE ER unit and the WMC ER using radio waves, the same as a desktop extension. A handset base is provided for battery charging. You need to install a rechargeable battery and charge it for about **8 hours** before initial use.

Before choosing a location for your new phone, read “Equipment Location Consideration” in the System configuration guide and follow the installation procedures. To utilize the Caller ID Display, you will need to subscribe to the service with your local telephone company.

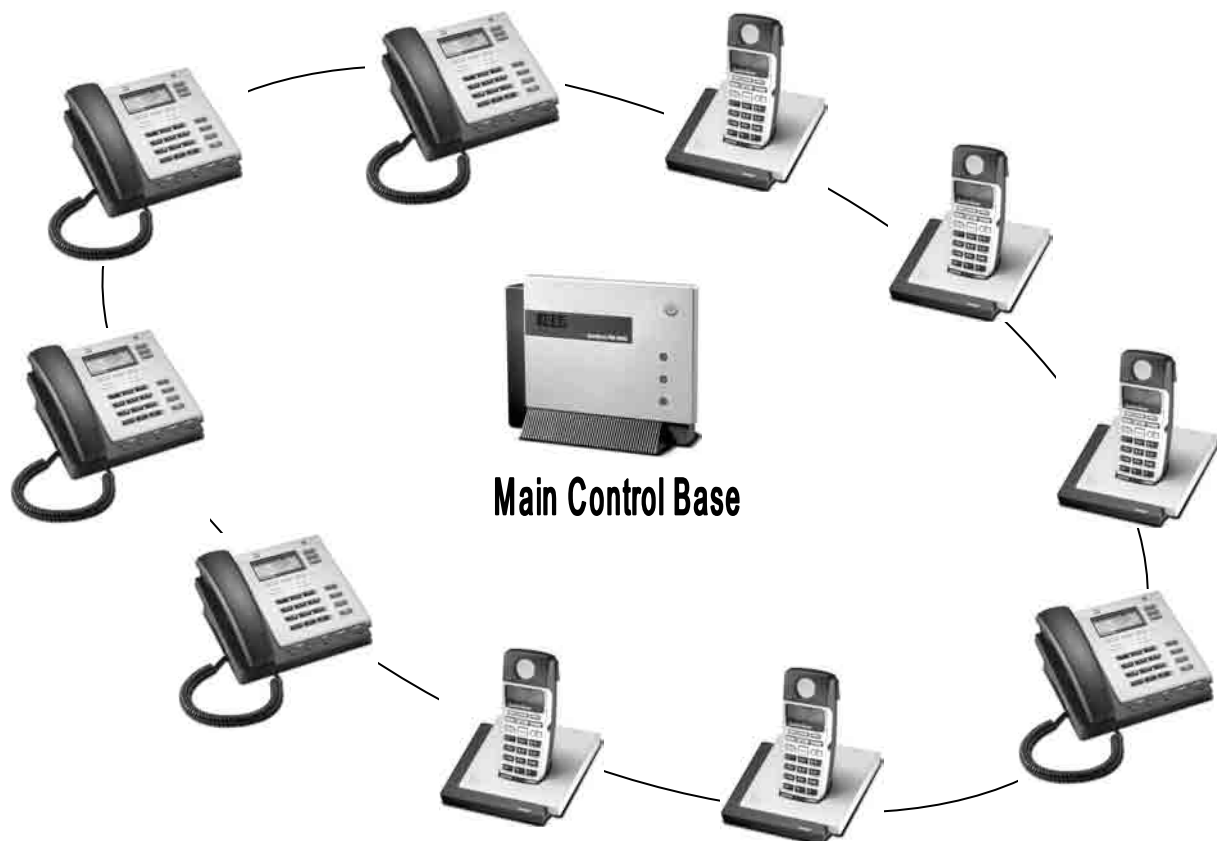

Feature Highlights


Handheld Extension (WHE ER)

- Ergonomic design
- Back lit key
- Large LCD with back lit - 4 row display with icons
- Speaker Phone
- Belt clip and headset jack
- User friendly operation
- Advanced menu with soft key
- Vibration ringer



2. Key Reference Guide


Overview of Handset

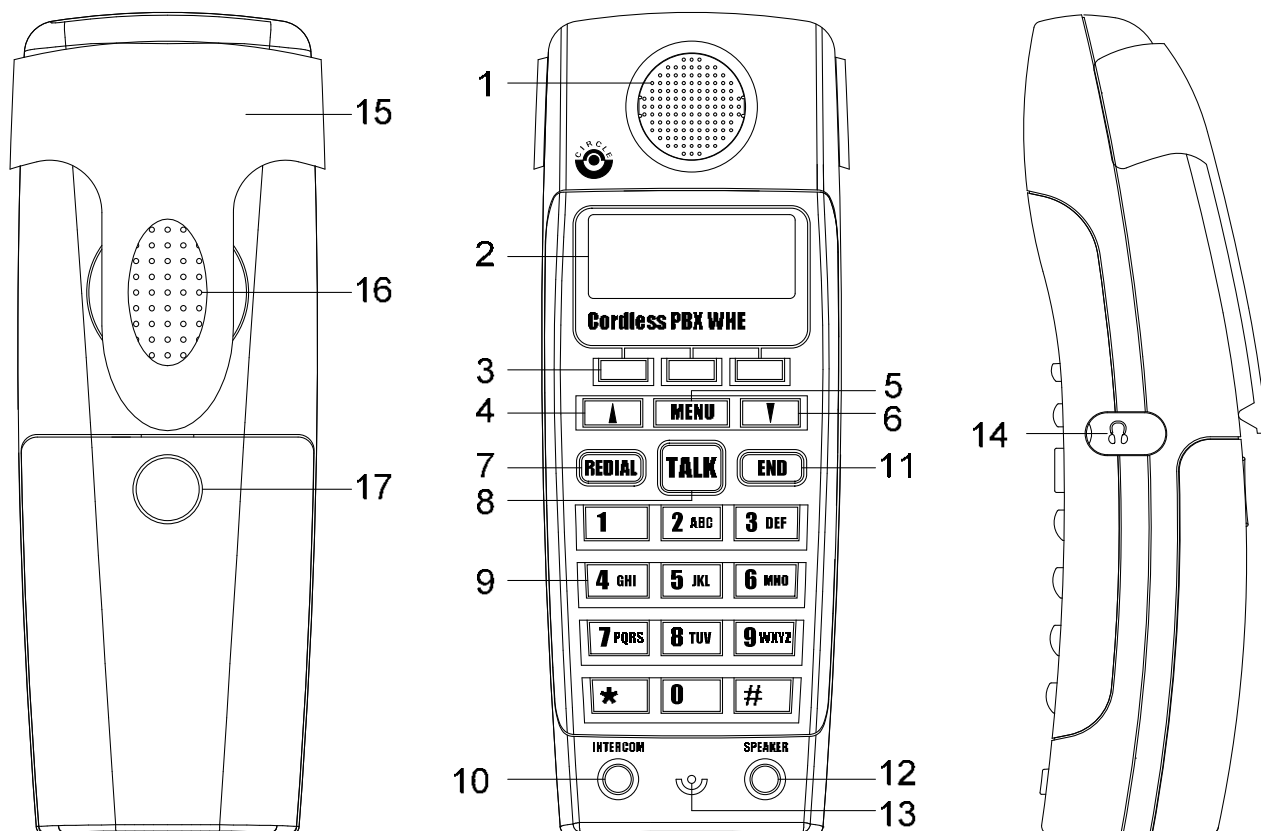

Item	Key Description	Functionality
1	Handset Earpiece	Hear the call
2	LCD Display	Shows date, time, owner name, message waiting indication, software menu features
3	Three Soft Key	Selects Soft menu features
4	▲ (Up) Key	Moves the position of the cursor, scrolls displaying in soft menu
5	MENU	Starts soft menu feature activation, exit soft menu and return the phone to idle mode
6	▼ (Down) Key	Moves the position of the cursor, scrolls displaying in soft menu
7	REDIAL	Last number redial
8	TALK	Pick Up the call
9	Dial Keypad	Enters Phone number and English character
10	INTERCOM	Call to extension with extension number
11	END	Disconnect the call
12	SPEAKER	Change the phone to hands free speaker mode, activate a call when the user has input a phone number
13	Microphone	Voice collect

14	Headset Jack	Remove rubber when connect headset
15	Belt Clip	Slots on each side of handset for insert belt clip
16	Speaker Outlet	Hear the call when change the phone to hands free speaker
17	Battery Cover (3.6V Battery)	Replacement of battery


Overview of handset base

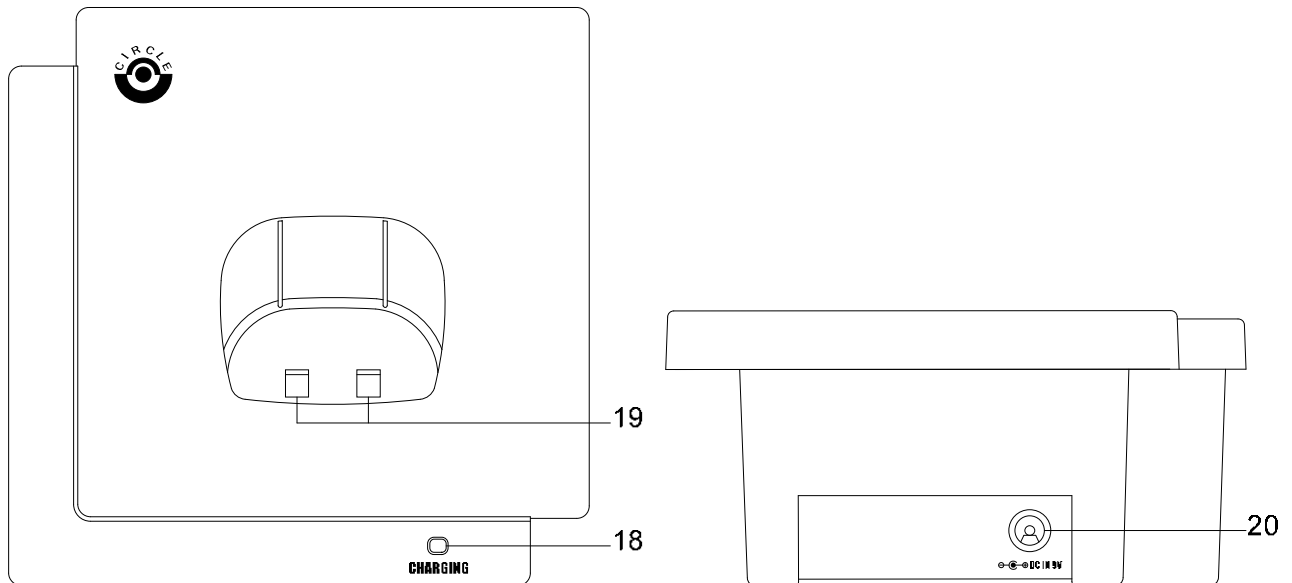

Item	Key Description	Functionality
18	Charging Lamp	It lights when charging
19	Charging Contact	Allows the handset charge on the base
20	DC 9V Input	Connects AC adaptor power source

3. Display

Backlit LCD display

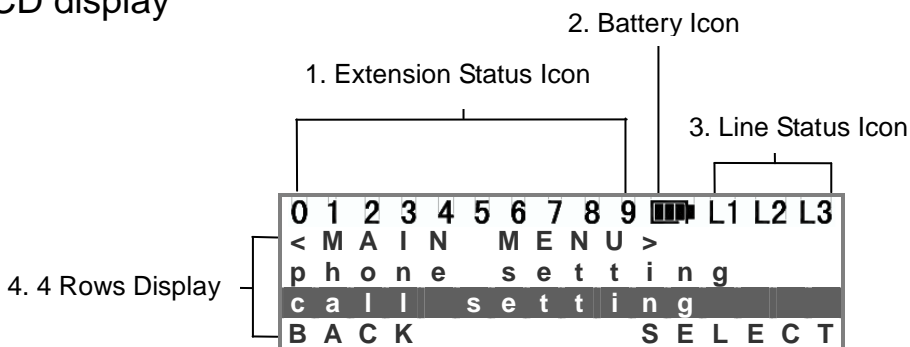

1.	<p>Extension Status icons functions as follows:</p> <ul style="list-style-type: none"> • OFF (invisible) The extension is idle. • ON (visible) The extension is being engaged.
2.	Battery Icon indicates the battery strength.
3.	<p>Line Status icons functions as follows:</p> <ul style="list-style-type: none"> • Off (invisible) The line is free. • ON (Visible) The line is being used. • Flashing: A call is on hold. The Voice Mail System is responding to a call.
4.	<p>The display shows the date, time and the dialed number, menu configuration options and phone book items. If you subscribe a Caller ID service, caller information will be displayed.</p> <p>The fourth line shows the soft key bar. You can press the corresponding soft key for the feature.</p>

Name Input

To edit the name field, numeric keys are used for both English characters (Upper case only) and digits. The following table illustrates how to input a desired character:

Key	First Press	Second Press	Third Press	Fourth Press	Fifth Press
0	0	0	0	0	0
1	Space	-	*	1	Space
2	A	B	C	2	A
3	D	E	F	3	D
4	G	H	I	4	G
5	J	K	L	5	J
6	M	N	O	6	M
7	P	Q	R	S	7
8	T	U	V	8	T
9	W	X	Y	Z	9
*	Reserved	-	-	-	-
#	Reserved	-	-	-	-

Soft Keys

Key	Description
AA	Auto Attendant
BACK	Back to previous screen
CLEAR	Clear all entry and back to previous screen
CONF	Conference Call
DEFAULT	Return to default value
DEL	Clear the digit entry
DIAL	Select a call record to make a call
DIR	Directory (Phone Book)
DND	Do not disturb, incoming call transfer to extension 0
HOLD	Hold the line
IN	Incoming Call History List (max. 20 records)
L1,L2 & L3	Line 1, Line 2 & Line 3
MISS	Missed Call History List (max. 20 records)
MUTE	Turn off MIC in Handset or Hands free mode
OK	Confirm the message
OUT	Outgoing Call History List (max. 10 records)
PAGE	Make a voice announcement
PAUSE	Insert the pause time in the phone number when required
PICK	Call pickup
PLAY	Play back the recording
QUIT	Quit the MENU
REC	Record the conversation
SAVE	Save the data entered (e.g. phone numbers in the phone book)
SELECT	Select the desired item highlighted in the Menu list
SET	Set condition
SILENT	Keep the ringer silent
STOP	Stop the function continue, e.g. stop recording
TXFR	Transfer Call to other extension
TXVM	Transfer the call to Voice Mail
V+	Increase the volume
V-	Reduce the volume
VM	Voice Mail function

4. Getting Start


Package Content

The full package of WDE ER includes the following items:


1. WHE ER Handset
2. Belt clip
3. Battery
4. Handset Base
5. AC Adaptor
6. WHE ER user guide

Installation


1. Open the battery cover (1). Insert the 3.6 V rechargeable battery plug to connector and put it in the box (2,3). Close the battery door afterwards (4).

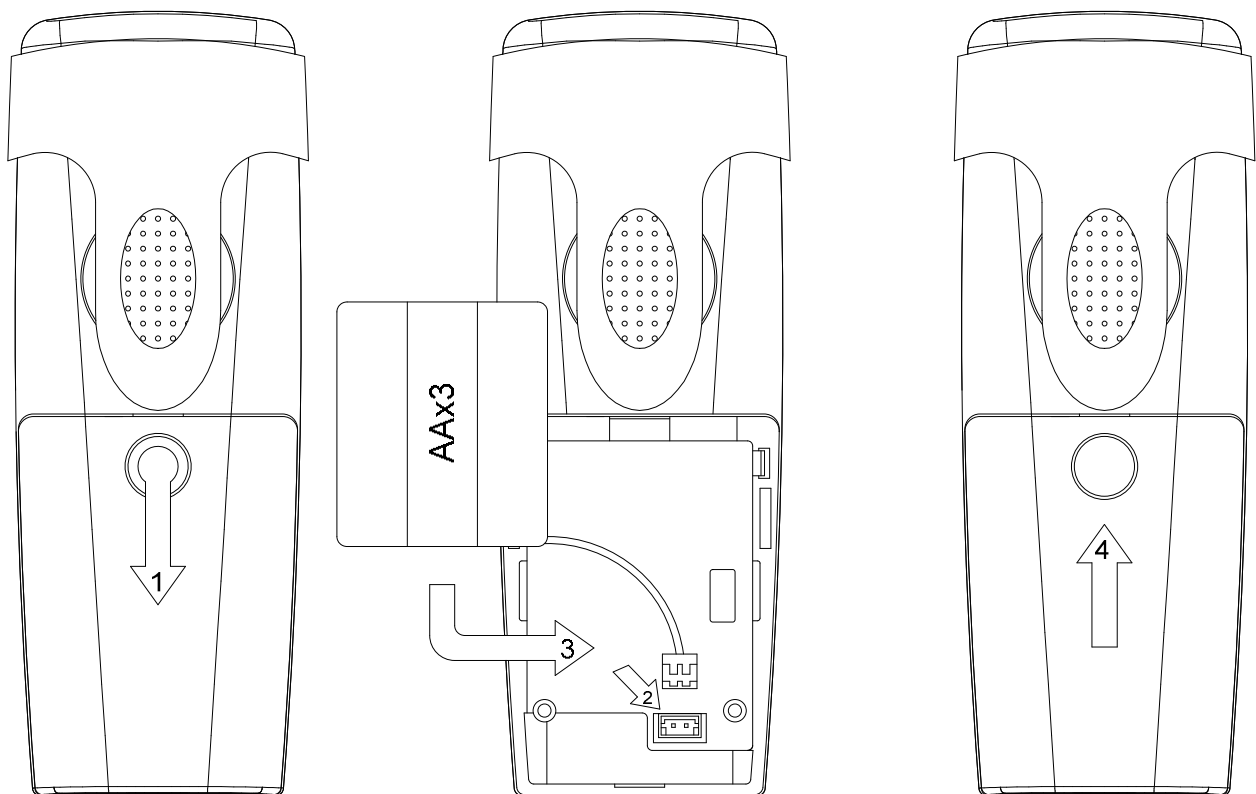

2. The phone is powered by the battery or DC supply. In 5 seconds, you will see that the phone completes its setup and displays the idle mode.

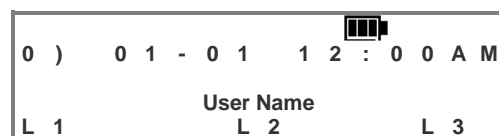

3. Insert the tip of the AC adaptor into the slot labeled DC 9V at the base of the phone. Make sure that the tip is all the way in. Plug the AC adaptor into an electrical outlet. Position the cord through the channel as given.

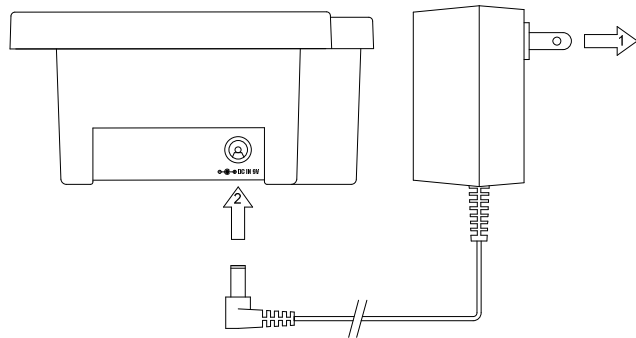

4. The best location for noise free operation
Move away from a microwave oven and locate the extension near the base console.
Move away from other cordless phones base unit.


Battery charge

Place the cordless handset on the base. Make sure the handset faces forward as shown. The CHARGE indicator will light. You have to charge it for about 8 hours before initial use.

Battery use time per fully charge:

- 6 hours continuous use at non speaker mode
- 80 hours standby mode

Recharge:

Place the cordless handset on the base when “” appears on the display



Note:

- The battery cannot be overcharge.
- When you charge the battery, you can feel it is warm. This is normal.
- The battery operating time may be shortened depending on usage conditions and ambient temperature.

5. Registration

When the extension is not registered to the main control unit, it shows 'Unregister.Handset' You have to register all extensions to the Main Control Base.

```

/ ) 0 1 - 0 1 0 0 : 0 0 A M
U N R E G I S T E R
H A N D S E T ! ! !
    
```

Whenever you want to change an extension number, you have to do the same registration procedure.

You first press the **MENU** key of your extension, scroll the **▲** up or **▼** down key to select "register" and press the soft key **SELECT** to confirm.

```

< M A I N M E N U >
c a l l h i s t o r y
r e g i s t e r
B A C K S E L E C T
    
```

Then select "register" from the sub menu by using the scroll key and press soft key **SELECT** to confirm.

```

< R E G I S T E R >
r e g i s t e r
u n r e g i s t e r
B A C K S E L E C T
    
```

Press the soft key **OK** for "REALLY REGISTER?"

```

< R E G I S T E R >
R E A L L Y
R E G I S T E R ?
Q U I T O K
    
```

Input EXT NO 0-9. Example : press the dial key '3' and then press soft key **OK** to confirm.

```

< R E G I S T E R >
I N P U T E X T N O 0 - 9
3
Q U I T O K
    
```

After assigning the extension number, press the "SET" button on the Main Control Unit with a beep sound.

```

< R E G I S T E R >
P R E S S B A S E S E T
W A I T F O R B E E P
Q U I T
    
```

Press the soft key **OK** to confirm the registration on the extension. Only one unit can be registered at a time using the main control unit.

```

< R E G I S T E R >
C O N F I R M
R E G I S T R A T I O N ?
Q U I T O K
    
```

If you press **QUIT** during registration, the extension will fail to register.

Set User name: Continue to enter a name by pressing the dial keypad and press the soft key **OK** when finish.

```

< R E G I S T E R N A M E >
E n t e r N a m e
B O
C L E A R D E L O K
    
```

Make sure that the main control unit and the extension are in standby mode. Registration must be completed within one minute.

For convenience, the desktop extension is set as extension 0 and the other two handheld extension are set as extension 1 & 2 respectively in the whole set package. When additional extensions required, you can register them as above from extension 3 to 9 without duplication.

6. Menu List

You can customize your unit according to your needs in the following Menu list. After pressing the **MENU** key, the LCD displays the main menu. You can scroll **▲** (up) or **▼** (down) key to view the list. You can highlight the item you need and press the soft key **SELECT** to select. The LCD displays sub-menu for subsequent setting or data input.

Voice Mail

- Voice Prompt
- Recording
 - Memo
 - Personal Greeting
 - Name
- Browse Mode
 - All
 - New Memo
 - All Memo
 - New Voice Mail (incoming message "ICM")
 - All Voice Mail
 - Filter
 - Personal Greeting (outgoing message "OGM")
 - Name
- Password

Phone Setting

- Vibration (off / on)
- Auto-talk (off / on "automatic fetch the incoming call when picking the WHE ER from base")
- Key Sound (off / on "Volume level from 1to 31")
- Ringer
 - Line Ring VOL (level from 0 to 31)
 - Line Ring Tone (select 0 to 8)
 - ICM Ring VOL (level from 0 to 31)
 - ICM Ring Tone (select 0 to 8)
- LCD contrast (level from 0-63)
- Headset mode (off / on)

Call Setting

- Call Forward
 - Off
 - On
 - Voice Mail (1. immediately 2. busy 3. no answer 4. busy & no answer)
 - Extension (Ext No. 0-9 except user's extension)
 - Line (Input the forward telephone number when intercom call)
- Make Toll Call
 - Toll Call restrict no. & password for make toll call
- Day/Night Mode (Allows to set when Advance Setup-Day/Night mode is enabled)

Phone Book

- Personal store
 - Browse (SELECT (01-50) shows the record no., name & telephone no. When the record is selected, you can make call, edit or delete.)
 - Add (Input name & Telephone number)
 - Upload (to the Main Control Base)
 - Download (from the Main Control Base)

- Del All Entry (Delete all really?)
 - Status
- Common Store (Allows 'Add and Delete' set at extension 0 or Computer)
- Browse (SELECT (01-16) shows the record no., name & telephone no. It shows empty if no data. When the record is selected, you can make call,)
 - Add (Input name & Telephone number)
 - Upload (to the Main Control Base)
 - Download (from the Main Control Base)
 - Del All Entry (Delete all really?)
 - Status

↓

Call History

- In Call (Incoming Call)
- Miss Call (Incoming miss Call)
- Out call (Outgoing Call)

↓

Register

- Register
- Unregister
- Set User name

↓

System Configuration (Allows set at extension 0 or Computer)

Basic Setup

- Time Setting
 - Set time format
 - Set date format
 - Daylight saving
 - CID update
 - Set time & date
- Outgoing Call (Ext can make outgoing call)
- Incoming Call (Ext will ring for the incoming call)
- Tone & Pulse
- Password

Advance Setup

- Day / Night Mode (manual / automatic)
- Line Mode (normal, line out only, call distribute, line disable)
- line to line
- ACD options (longest idle / circular)
- Restrict Toll (restricted extension, restricted no., toll enabled password)

Voice Mail / AA

- Voice Mail Setting (password, max record time, max message no., greeting time, sound level, silence detect, route to AA, & minimum duration)
- Auto Attendance Setting (afternoon mode, AA timeout, supervisor password)

Handset Management

- Edit User Name
- Delete Extension

Technical


- Technical Default Setting
- Call Setting (Call Auto Transfer, Hold Recall Timer)
- Technical Setting
- Restore Factory Default

Note : System Configuration can only operated at Extension 0 or using computer connected to the Main Control Unit via RS232

End


7. Using the Phone

Outgoing Call

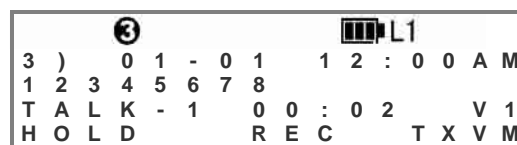

- Handset Mode:** Press the **TALK** key and get an available line, L1-L3 automatically. Press the phone number.
- Hands Free Mode:** Press the **SPEAKER** key and get an available line, L1-L3 automatically. Press the phone number.
- Result** LCD will display the phone number, the engaged line number, duration of the conversation and the Volume level Vx (x: 1 to 5)
- Note :** Press **SPEAKER** key is toggle switch on and off. It will switch the phone from Handset mode to Hands Free mode and vice versa during conversation.
Press the **END** key to end the call in either hands free mode or handset mode.

Intercom Call

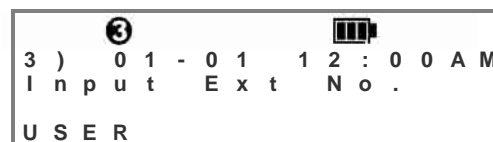

- Handset Mode:** Press the **INTERCOM** key. You can hear an internal dial tone. Press the extension number. Press **END** key when finish the call.
- Hands Free Mode:** Press the **INTERCOM** key and then press **SPEAKER** key You can hear an internal dial tone. Press the extension number. Press **END** key when finish the call.

Pre-dialing



Pre-dialing allows you to input a phone number and examine it before dialing. You can input a phone number first. On the display, you can inspect the phone number and correct it by the soft key **DEL**. You can insert pause between digits if required. Finally, you can start the phone call by pressing **TALK** or **SPEAKER** key and select available line automatically. You can press **END** to stop the phone number input and the phone returns to idle mode

Receiving Incoming Call

- Handset Mode:** Press **TALK** key when the phone is ringing.
- Hands Free Mode:** Press **SPEAKER** key when the phone is ringing.

Receiving Intercom Call

Handset Mode: Press **TALK** key when the phone is ringing.

Hands Free Mode: Press **SPEAKER** key when the phone is ringing.

Redial


The phone stores the last outgoing call number. You can press **Redial** key and then press **TALK** or **SPEAKER** to make an outgoing call by using the stored number.

Mute

Press the soft key **MUTE** will deactivate the microphone on the phone during conversation. This turns the phone to a monitor set (listen only). Press Mute key again to resume conversation.

8. Feature Operation

Auto Attendance

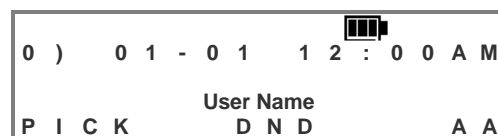

Description: This feature is useful to back up an operator to receive an incoming call. When the operator is not available, incoming calls will be forwarded to the voice mail system. The outside caller can press the extension number of a desired extension or leave a message in extension “0” after a beep tone.

Activation: Press the soft key **AA** in idle mode


Result: LCD will acknowledge the setting.



Deactivation: Press the soft key **AA** again and the extension return to normal mode

Condition Extension 0 is default as the system operator. This feature should be activated and deactivated at extension ‘0’ for the system. When the called extension is not set to call forward to voice mail, the outside caller will leave message in extension “0”.

Call Forward

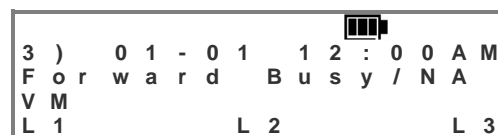

Description: Call forwarding feature enable you to have calls forwarded to a specified destination. You may specify the circumstances under which your calls are forwarded.

0: immediately 1: Busy
2: No answer 3: Busy & No Answer

Activation:


1. Press **MENU** button, scroll **▲** up or **▼** down key to select Call Setting → Call Forward (**On**).
2. Scroll **▲** up or **▼** down key to select Voice Mail, or Extension number (**input ext. no.**), or Line number (**input telephone no.**)
3. Press condition of call forward

Result: The LCD show “forward ‘ destination acknowledgement

Deactivation: Press **MENU** button, scroll **▲** up or **▼** down key to select Call Setting → Call Forward (**Off**).


Condition: Call forward to Line can be set at extension 1 – 9 for internal call and extension 0 is set for Line to Line forward for the system.

Call Hold

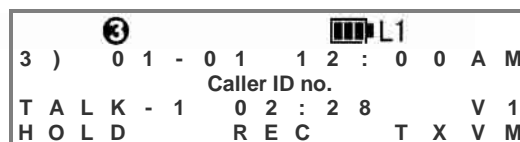

- Description:** You can use Call Hold to put a call on hold temporary. The held party will hear music during holding period.
- Activation:**
1. During conversation, press soft key **HOLD** .
 2. You will hear a dial tone.
 3. a. To call third party, dial the number you want to call or b. to answer another incoming line that is ringing at another extension, press the soft key **PICK**.
 4. Switch between two parties by press the soft key **HOLD** .
 5. If you want to drop the party on line and return to the party on hold, you can hang up. Your telephone rings, you lift up handset to resume conversation with the party on hold.
- Result:** The held line icon is flash.
- Condition:** If a call on hold is not retrieved in a specified period, the system will automatically recall the extension user.

Call Hold, Exclusive

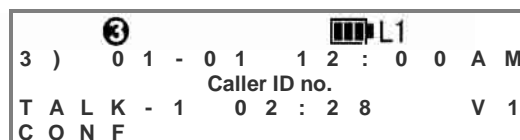


- Description:** You can use the soft key **CONF** to put a call on exclusive hold condition. The held party will hear music during holding period. The call can only be picked up again at the same extension. When time out occurs, the exclusive hold condition will change to common hold condition and can be picked up at any extension.
- Activation:** During conversation, press soft key **CONF** .
- Result:** The held line icon is flash.
- Condition:** If a call on hold is not retrieved in a specified period, the system will automatically recall the extension user.

Call Paging




- Description:** Paging allows you to make a voice announcement through a PA system via the Audio Out port of the main control base.
- Activation:**
1. Press the soft key "PAGE" in idle mode.
 2. 'PAGING' will appear on the LCD
 3. Make a voice announcement.
 4. Press **END** key when finish the announcement
- Result:** The LCD will show 'Paging' acknowledgement.
- Condition:** It is optional. To connection the Audio Out Port to a PA system use an audio cable with a 3.5mm plug.

Call Pickup

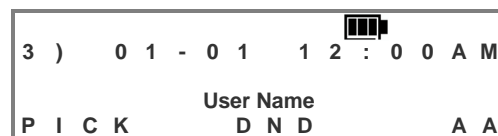

Description: Allows any extension user to answer an incoming line or internal call that is ringing at another telephone
Activation: Press the soft key **PICK** to pick up all calls

Call Transfer

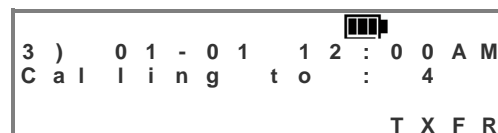


Description: Call Transfer feature allows the user to transfer a call to another party.
Activation:

1. Press the soft key **HOLD** to hold the 1st party.
2. Press extension number.
3. Press the soft key **TXFR** to transfer call.

Result: When the call transfer is completed, the LCD is in idle mode.
Condition: Only the Line call directly transfers to an extension party.

Call Transfer (Mail Box)

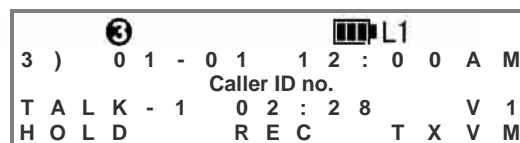

Description: Call Transfer feature allows the user to transfer a call to another party's mail box .
Activation:

1. Press the soft key **TXVM** to hold the call.
2. Press extension number.

Result: When the call transfer is completed, the LCD is in idle mode.

Caller Display




Description: Caller's telephone number can be viewed on display.
Activation: If the call is missed, the Indication lamp is on. You can press the soft key **MISS** to view record. You can press the soft key **IN** or **OUT** to view the call history of incoming or outgoing calls.
Result: LCD shows the caller's telephone number, time and date for miss or incoming call. Only telephone number is displayed for outgoing call.
Condition: Subscribe for the service from your local telephone company

Clock Mode

- Description: Allows the extension user to set 12hr or 24hr mode in the preset time
- Activation: 1. Press **MENU** button, scroll **▲** up or **▼** down key to select System Config.→Basic Setting→Time Setting→ Time Format.
2. Select 12hr mode or 24hr mode.
- Result: The LCD will show clock mode in the normal mode.
- Reference: Clock mode must be modified by using a phone via **extension 0**

Conference

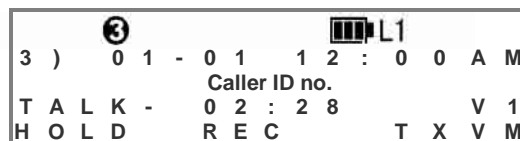


- Description: The system supports three-party conference call, including external and internal parties. During a two-party conversation, the extension user can add a third party to their conversation, thereby establishing a conference.
- Activation: 1. During the conversation with 1st party, press the soft key **HOLD** to hold the 1st party.
2. Input Extension no. to call extension or press line Key (L1 – L3) to call outside part
3. Press the soft key **CONF** to conference when 2nd caller answered.
- Result: The LCD display “conference’ and The conference is establishing
- Condition: 1. Either party can terminate the line.
2. Possible conference combination is: 2-insides and 1-outside; and 1-inside and 2 outside
3. One conference call at one time for the system

Date & Time

- Description: Allows the extension user to modify the Date & Time
- Setup: 1. Press **MENU** button, scroll **▲** up or **▼** down key to select System Config→ Basic Setup→ Set time & date.
2. Enter the present date / time / day.
- Result: The LCD will show the present date & time
- Condition: Date and Time must be modified by using a phone via **extension 0** or PC programming at the base.
Date & Time can be set enable to update by incoming call with caller ID subscribed.

Dedicated Line

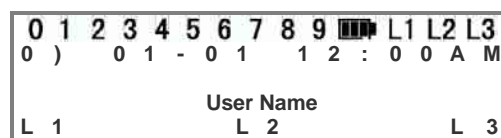


Description: Allows the extension user to access a specified Line.
 Activation: Press the soft key button L1, L2 or L3
 Result: The LCD show Line Icon on if occupied

Directory (DIR)



Description: Allows the extension user to have access to personal or common phone book.
 Activation: Press the soft key **DIR** select common or personal phone book, Browse and select the record by scrolling **▲** Up or **▼** Down Key.
 Result: The dialing number and name will display on the LCD, and begin to dialing

Do Not Disturb (DND)

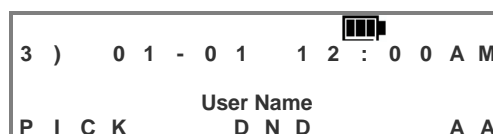


Description: Allows an extension user to transfer incoming line or extension calls to Extension 0.
 Activation: Press the soft key **DND** to turn on DND.
 Result: The LCD shows DND when action
 Deactivation: Press the soft key **DND** again and the DND is gone out.
 Condition: Extension 0 is not allowed to set this feature.

Headset

Description: Allows the user to use a headset.
 Activation: Connect a headset with 2.5 mm plug to the headset jack. Press the **MENU**, use **▲** Up and **▼** Down Scroll key to select Phone Setting → headset mode (**On**). LCD will acknowledge the setting of headset with "HS" flashing.
 Condition: This is an option. When in use, incoming call ring and all conversations are only heard in the headset. The speaker mode is disconnected.

INTERCOM

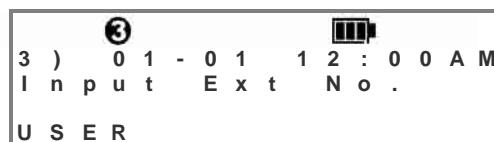

- Description: Allows the extension user to call another user within the system.
- Activation: Press **INTERCOM** and extension number in either handset or hands free mode. You can press the soft key **USER** to preview the user name and use scroll key to select.
- Result: The LCD display the extension that you call.

Key Sound

- Description: Allows extension user to be alert at pressing a dialing key.
- Activation: Press **MENU**, using **▲** up & **▼** down scroll key to select Phone Setting → Key Sound **(On)**.
Using **▲** up & **▼** down scroll key to select volume level from 1 to 31.
Default: On
- Result: The LCD will show the key sound acknowledgement.
- Deactivation: Press **MENU** button, scroll **▲** up and **▼** down key to select Phone Setting → Key Sound **(Off)**.

LCD Contrast

- Description: Allows the user to adjust the contrast of LCD for best display.
- Setup: Press **MENU**, using **▲** up & **▼** down scroll key to select Phone Setting → LCD contrast **(level from 0-63)**.


Line To Line Forward

- Description: Allows an Incoming call to be automatically transferred to an external destination.
- Activation::
1. Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Call Setting → Call Forward **(On)** →Line→Enter FWD number.
2. Input the destination number.
3. Press Soft key **OK** to exit
- Result: The LCD shows the Line forward acknowledgement.
- Deactivation: Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Call Setting →Call Forward **(Off)**
- Condition This function can only be set at extension 0 and works in a system with a minimum 2 telephone lines.
It requires initial system setting. (Press **MENU**, use **▲** Up and **▼** Down Scroll key to select System Config → Advanced Setup → Line to Line →Enter FWD number.)

Make Toll Call

- Description: Any extension can be released from a toll call restriction and dial an international call when the entered password is the same as the stored code.
- Activation::
1. Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Call Setting → Make Toll Call
 2. Enter 4-digit password. The extension returns to idle mode.
 3. If the password is correct, the outgoing call can be made.
- Condition This requires that the system has initial set-up at extension 0 for the stored code and the restricted code.

Memo Recording

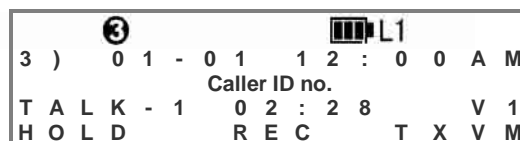

- Description: The function allows user to record memo during conversation.
- Activation: During conversation, press soft key **REC** and **STOP** to record the memo, as you want.
- Deactivation Press the soft key **STOP** to end recording.
- Result: The LCD will show the held call acknowledgement.
- Condition: The phone must be in conversation mode.
It engages the system just like as a conference call.

Mute

- Description: Allows the user to turn off the microphone in Handset or Hands free
- Activation: Press Soft key **MUTE** to turn off the microphone in the handset if you have taken up the handset
Press **MUTE** button to turn off the microphone in the hands free if you have pressed the **SPEAKER** key
- Result: The Microphone is turned off and the "Mute On" is showed on LCD
- Deactivation: Press Soft key **MUTE** again and the Mute disappeared.

Night Mode

- Description: Allows the extension user to set the Day and Night modes operation. Day / Night mode can be switched either automatically at a pre-assigned time or manually at any time desired.
- Activation: Press **MENU** and use **▲** Up and **▼** Down Scroll key to select Call Setting → Day / Night Mode.
- Result: "NIGHT" sign will show on LCD if the night mode is turn on.
- Condition: Manual Mode: It should be first set Day/Night Mode enabled

in Advance Setup and activated at extension 0.
Night Mode Automation must be set by system programming
via **extension 0**

Phone Book: Common Store

- Description: Allows the extension user to use directory dialing. The system provides 16 memories for Common Phone Book.
- Setup:
1. Press **MENU** and use **▲** Up and **▼** Down Scroll key to select Phone Book → Common Store → browse or add
 2. If a record exists, enter the browse mode and use **▲** Up and **▼** Down Scroll key to select record or press the name to search, then select “edit” to the edit the name and phone number with the dial key.
 3. If you create new record, enter the “add” mode. Input the name and phone number with the dial key pad.
 4. Press the soft key **OK** to confirm.
 5. Then press soft key **BACK** to the Sub Menu “Common Store” and select “upload” to upload the record to Main Control Base.
 6. Press **MENU** again to exit
- Activation: Press the soft key to select Directory (DIR) → Common Phone Book to browse the list with **▲** Up or **▼** Down Scroll key to select the desired record.
- Result: The LCD shows the record acknowledgement
- Condition: Common Phone Book must be stored using a phone via extension **0**

Phone Book – Personal Store

- Description: Allows the extension user to use directory dialing. The system provides 50 memories (1- 50) for Personal Phone Book.
- Setup:
1. Press **MENU** and use **▲** Up and **▼** Down Scroll key to select Phone Book → Personal Store → browse / add
 2. If a record exists, enter the browse mode and use **▲** Up and **▼** Down Scroll key to select record or press the name to search, then select “edit” to the edit the name and phone number with the dial key.
 3. If you create new record, enter the “add” mode. Input the name and phone number with the dial key pad.
 4. Press the soft key **OK** to confirm.
 5. Then press soft key **BACK** to the Sub Menu “Personal Store” and select “upload” to upload the record to Main Control Base.
 6. Press **MENU** again to exit
- Activation: Press the soft key to select Directory (DIR) → Personal Phone Book to browse the list with **▲** Up or **▼** Down Scroll key to select the desired record.

Result: The LCD show the record acknowledgement

Redial

Description: Every telephone in the system automatically saves the last telephone number dialed to a line and allows the extension user to dial the same number again.

Activation: Press redial and the telephone dials the last number once time.

Result: The LCD show the last number

Ring Tone and Volume – Line / Intercom

Description: Allows the telephone user to turn up or down the following volume as desired:

Handset receiver volume

Ringer volume

Speaker volume

Setup: Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Phone Setting → Ringer

1. Line Ring VOL : press **▲** Up or **▼** Down Scroll key to select the volume level from 0 to 31
2. Line Ring Tone : press **▲** Up or **▼** Down Scroll key to select the pattern from 0 to 8
3. Intercom Ring VOL : press **▲** Up or **▼** Down Scroll key to select the volume level from 0 to 31
4. Intercom Ringer Tone : press **▲** Up or **▼** Down Scroll key to select the pattern from 0 to 8

Result: The LCD displays indicate the level.

Speaker

Description: Allows the extension user to use hands free in a conversation

Activation: Press **SPEAKER** key to turn on the speaker

Result: The **SPEAKER** key LED lights on when press and turns off after a while.

Deactivation: Press **SPEAKER** key again to turn off speaker mode It is toggle switch on and off.

Note Press the **END** key to end the call in either hands free mode or handset mode.

User Name

Description: The user name display is programmable. The user name will be collected automatically when the phone is plugged in. The user name will display on the LCD and use to alert the other extension in calling information display

- Setup:
1. Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Register → Set User name.
 2. The LCD displays “ user ext “
 3. Press the soft key **EDIT** to edit the user name
 4. Press the soft key **CLEAR** to clear the existing entry
 5. If modifying the exiting user name press **▲** or **▼** to move cursor.
 6. Press **OK** to save the user name to system and screen go back to normal mode.
- Result: The new user name will display

Voice Mail

Description: This feature set provides multiple users with personal mailboxes. You can reduce the number of miss-handled calls by offering callers a comprehensive voice messaging system. When there is a new message in a mailbox, the voice mail indicator will light (voice mail key for WDE ER)

Set up There are two ways to enter the user’s menu:


1. Press voice mail key when the indicator is not illuminated.
2. Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Voice Mail→Voice prompt

The voice prompt will assist the user through a step-by-step process in setting up personal greeting, password or set auto message copy.

Press Key	Operation
3	Play message
4	Play memo
5	Change personal greeting
6	Change password
8	Set auto message copy
*	End

Activation: You can also set the password via the menu by using **▲** Up and **▼** Down Scroll key to select Voice Mail→password. The extension should be programmed to be voice mail capable. Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Call Setting → Call Forward (on) →Voice Mail (immediately / busy / no answer / busy & no answer). LCD will acknowledge the condition you set.

- Result:** There are two ways to retrieve the voice mail.
1. When the **VOICE MAIL** key lights up, a single key press will change the phone to hands free mode and the user can follow the voice prompt in retrieving a message or memo. The sequence of message playback will be first in last out.
 2. You can browse the voicemail record to select which message playback you choose. Press **MENU**, use **▲** Up and **▼** Down Scroll key to select Voice Mail → Browse Mode (all / new memo / all memo / new voice mail / all voice mail / filter<by name / *before or after the month selected>).
- Condition** A mailbox can be accessed remotely. During the personal greeting, the user can press **[**]** and then the password, to access the user menu remotely. This feature can only be activated if the user has a password in the mailbox.
- * Filter by Month :**
- You can set the period (before or after the month set) of voice mail recorded to play back.
1. Enter the month as 2 digits (e.g. 06 for June).
 2. Press the soft key “SET” to toggle “before” or “after”. You can re-enter until set correctly.

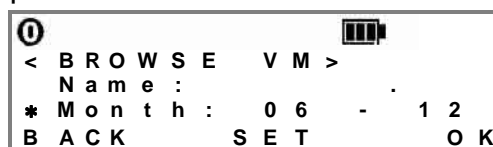

Volume Adjustment – Speaker/Handset Receiver/Ringer

- Description:** Allows the telephone user to turn up or down the following volume as desired:
Handset receiver volume
Speaker volume
Ringer
- Setup:** Use the soft key **V+** or **V-** to adjust :
1. Handset receiver volume when the handset off-hook.
 2. Ringer volume in the idle mode
 3. Speaker Volume by pressing **Speaker** key first
- Condition:** Handset volume has 5 levels (1-5) of adjustment
Ringer volume has 32 levels (0-31) of adjustment
Speaker volume has 5 levels (1-5) of adjustment
- Result:** The LCD displays “Vx ” to indicate the level.

9. Important Safety Instruction

When using this unit, basic safety precautions should always be followed to reduce the risk of fire, electric shock, or personal injury.

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners; use a damp cloth for cleaning.
4. Do not use this unit near water; for example, near a bathtub, washbowl, kitchen sink, or laundry tubs, in a wet basement, or near a swimming pool.
5. Do not place this unit on an unstable cart, stand or table. It could fall, causing serious damage or impeding operation.
6. This unit should never be placed near or over a radiator or heat register.
7. Never push objects of any kind into this unit as they may touch dangerous voltage points or short out parts that could result in the risk of fire or electrical shock. Never spill liquid of any kind on this unit.
8. Never touch bare telephone wires or terminals unless the telephone line has been disconnected.
9. Use only the power source marked on the unit. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.
10. Do not place objects on the power cord. Install the unit where no one can step or trip on the cord.
11. Do not overload wall outlets and extension cords. This can result in the risk of fire or electric shock.
12. Under the following conditions the telephone unit should be returned for maintenance:
 - i. If liquid has been spilled into the unit
 - ii. If the unit has been exposed to rain or water
 - iii. If the unit does not operate normally by following the operating instructions
 - iv. If the unit has been dropped or the casing damaged
 - v. If the unit exhibits a distinct change in performance.
13. Do not disassemble this unit. It will void the warranty. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect re-assembly can cause electrical shock during subsequent use.
14. Avoid using the telephone except cordless type during a thunderstorm. There may be a slight risk of electrical shock from lightning.
15. Do not use this unit to report a gas leak, when in the vicinity of the leak.

CAUTION:

To reduce the risk of fire or injury to persons, read and follow these instructions.

1. Use only the battery(ies) specified.
2. Do not dispose of the battery(ies) in a fire. They may explode. Check with local waste management codes for special disposal instruction.
3. Do not open or mutilate the battery(ies). Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte may be toxic if swallowed.
4. Exercise care in handling batteries in order not to short the battery to conductive materials such as rings, bracelets, and keys. The battery may overheat and cause burns.
5. Charge the battery(ies) provided with or identified for use with this product only in accordance with the instructions in this instruction.

Warning :

To prevent Fire or shock hazard, do not expose this product to rain or any type of moisture.

10. Hardware Specification

RF Frequency Band	2.4GHz
Telephone Line	3
Hands Free	Hands Free Speaker Phone
LCD Display Module	4 line LCD Alpha Numeric Display
Display	Data and Time Display
Caller ID with Call Waiting	Type 1 (FSK) & Type II
Voice Mail / Message Recording	1 hour
Maximum Distance (open space, line at sight)	1300 ft.
Weight	250g
Color	Dark Grey / Silver
Dimension Handset (WxDxH)	157 x 57 x 43 mm
Dimension Handset Base (WxDxH)	138 x 138 x 66 mm
WHE ER Power / Adaptor	DC 9V / 500mA
Back Up Battery (rechargeable)	3.6 V

Operating Condition:

Temperature	0 to 45 °C
Humidity	10% to 95%

11. Limited Warranty

Circle Communication Product Inc (“Circle”) warrants that this 2.4G Multi-line & Multi-handset Cordless Telephone (“Product”) is free from defects in material and workmanship that result in

Product failure during normal usage, according to the following terms and conditions:

1. The limited warranty for the Product extends for ONE (1) year beginning on the date of the purchase of the Product.
2. The limited warranty extends to the original customer of the Product (“Customer”) and is not assignable or transferable to any subsequent customer/end-user.
3. The limited warranty extends only to the Customer who purchased the Product in the United States.
4. During the limited warranty period, Circle will repair, or replace, at Circle® option, any defective parts, or any parts that will not properly operate for their intended use with new or factory rebuilt replacement items if such repair or replacement is needed because of product malfunction or failure during normal usage. No charge will be made to the Consumer for any such parts. Circle will also pay for the labor charges incurred by Circle in repairing or replacing the defective parts. The limited warranty does not cover defects in appearance, cosmetic, decorative or structural items, including framing, and any non-operative parts. Circle® limit of liability under the limited warranty shall be the actual cash value of the Product at the time the Consumer returns the Product for repair, determined by the price paid by the Consumer for the Product less a reasonable amount for usage. Circle shall not be liable for any other losses or damages.

These remedies are the Customer’s exclusive remedies for breach of warranty.

5. Upon request from Circle, the Consumer must prove the date of the original purchase of the Product by a dated bill of sale or dated itemized receipt.
6. The Customer shall bear the cost of shipping the Product to Circle in United Status. Circle shall bear the cost of shipping the Product back to the Customer after the completion of service under this limited warranty.
7. The Customer shall have no coverage or benefits under this limited warranty if any of the following conditions are applicable:
 - a) The Product has been subject to abnormal use, abnormal conditions, improper storage, exposure to moisture or dampness, unauthorized modifications, unauthorized connections, un-authorized repair, misuse, neglect, abuse, accident, alteration, improper installation, or other acts which are not the fault of Circle, including damage caused by shipping.
 - b) The Product has been damaged from external causes such as collision with an object, or from fire, flooding, sand, dirt, windstorm, lightning, earthquake or damage from exposure to weather conditions, an Act of God, or battery leakage, theft, blown fuse, or improper use of any electrical source, or damage caused by the connection to other products not recommended for interconnection by Circle.
 - c) Circle was not advised by the Customer in writing of the alleged defect or malfunction of the Product within fourteen (14) days after the expiration of the applicable limited warranty period.
 - d) The Product serial number plate or the accessory data code has been removed, defaced or altered.

8. If a problem develops during the limited warranty period, the Customer shall take the following step-by-step procedure:

- a) the Customer shall contact Circle Customer Service:

Circle Communication Product Inc.

Phone: **310-335-0305**

Email : cs@circleproducts.com

b) The Customer shall include a return address, daytime phone number and/or fax number, complete description of the problem, proof of purchase and service agreement (if applicable). Expenses related to removing the Product from an installation are not covered under this limited warranty.

c) The Customer will be billed for any parts or labor charges not covered by this limited warranty. The Customer will be responsible for any expenses related to reinstallation of the Product.

d) Circle will repair or authorize the repair of the Product under the limited warranty within 30 days after receipt of the Product by Circle or any Circle authorized service center. If Circle cannot perform repair covered under this limited warranty within 30 days, or after a reasonable number of attempts to repair the same defect, Circle at its option, will provide a replacement Product or refund the purchase price of the Product less a reasonable amount for usage.

e) If the Product is returned to Circle during the limited warranty period, but the problem with the Product is not covered under the terms and conditions of this limited warranty, the Customer will be notified and given an estimate of the charges the Customer must pay to have the Product repaired, with all shipping charges billed to the Customer. If the estimate is refused, the Product will be returned freight collect. If the Product is returned to Circle after the expiration of the limited warranty period, Circle's normal service policies shall apply and the Customer will be responsible for all shipping charges.

9. The Product consists of newly assembled equipment that may contain used components that have been reprocessed to allow machine compliance with Product performance and reliability specifications.

10. ANY IMPLIED WARRANTY OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE OR USE, SHALL BE LIMITED TO THE DURATION OF THE FOREGOING LIMITED WRITTEN WARRANTY. OTHERWISE, THE FOREGOING LIMITED WARRANTY IS THE CONSUMER'S SOLE AND EXCLUSIVE REMEDY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. CIRCLE SHALL NOT BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO, LOSS OF ANTICIPATED BENEFITS OR PROFITS, LOSS OF SAVINGS OR REVENUE, PUNITIVE DAMAGES, LOSS OF USE OF THE PRODUCT OR ANY ASSOCIATED EQUIPMENT, COST OF CAPITAL, COST OF ANY SUBSTITUTE EQUIPMENT OR FACILITIES, DOWN-TIME, THE CLAIMS OF ANY THIRD PARTIES, INCLUDING CUSTOMERS, AND INJURY TO PROPERTY, RESULTING FROM THE PURCHASE OR USE OF THE PRODUCT OR ARISING FROM BREACH OF THE WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, STRICT TORT, OR ANY OTHER LEGAL OR EQUITABLE THEORY, EVEN IF CIRCLE KNEW OF THE LIKELIHOOD OF SUCH DAMAGES. CIRCLE SHALL NOT BE LIABLE FOR DELAY IN RENDERING SERVICE UNDER THE LIMITED WARRANTY, OR LOSS OF USE DURING THE PERIOD THAT THE PRODUCT IS BEING REPAIRED.

11. Some states do not allow limitation of how long an implied warranty lasts, so the above one-year warranty limitation may not apply to you (the Consumer). Some states do not allow the exclusion or limitation of incidental and consequential damages, so certain of the above limitations or exclusions may not apply to you (the Consumer). This limited warranty gives the Customer specific legal rights and the Customer may also have other rights, which vary from state to state.

12. Circle neither assumes nor authorizes any authorized service center or any other person or entity to assume for it any other obligation or liability beyond that which is expressly provided for in this limited warranty including the provider or seller of any extended warranty or service agreement.

13. This is the entire warranty between Circle and the Customer, and supersedes all prior and contemporaneous agreements or understandings, oral or written, and all communications relating to the Product, and no representation, promise or condition not contained herein shall modify these terms.

14. This limited warranty allocates the risk of failure of the Product between the Consumer and Circle. The allocation is recognized by the Customer and is reflected in the purchase price of the Product.

15. Any action or lawsuit for breach of warranty must be commenced within twelve (12) months following delivery of the Product.

16. Questions concerning this limited warranty may be directed to:

Circle Communication Product Inc.

Phone: **310-335-0305**

Email : cs@circleproducts.com

17. The limited warranty period for Circle supplied attachments and accessories is specifically defined within their own warranty cards and packaging.

12. Important Consumer Information

When using this unit, basic safety precautions should always be followed to reduce the risk of fire, electric shock, or personal injury.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

1) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is needed.
- Consult the dealer or an experienced radio/TV technician for help.

2) This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of this equipment is a label that contains, among other information, a product identifier in the format US:AAAEQ##TXXXX. If requested, this number must be provided to the telephone company.

3) An applicable certification jacks Universal Service Order Codes (USOC) for the equipment is provided (i.e., RJ11C) in the packaging with each piece of approved terminal equipment.

4) A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

5) The REN is used to determine the number of devices that may be connected to a telephone line. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local telephone company. [For products approved after July 23, 2001, the REN for this product is part of the product identifier that has the format US:AAAEQ##TXXXX. The digits represented by ## are the REN without a decimal point (e.g., 03 is a REN of 0.3). For earlier products, the REN is separately shown on the label.]

6) If this equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

7) The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.

8) Should you experience trouble with this equipment, please contact (Circle Communication Products, 2554 Lincoln Blvd #111 Marina Del Rey CA 90291 USA) for repair or warranty information. If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.

9) Please follow instructions for repairing if any (e.g. battery replacement section); otherwise do not alternate or repair any parts of device except specified.

10) Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information.

11) NOTICE: If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this [equipment ID] does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

12) This equipment is hearing aid compatible.

NOTICE: According to telephone company reports, AC electrical surges, typically resulting from lightning strikes, are very destructive to telephone equipment connected to AC power sources. To minimize damage from these types of surges, a surge arrestor is recommended.

Customer Service

For customer support for any questions or help in installing or using your new
Circle Cordless Telephone,

Call Toll Free
1-888-584-9262

7:00 AM to 5:00 PM
Pacific Standard Time

www.circleproducts.com

2554 Lincoln Blvd. #111
Marina Del Rey, Ca 90291